


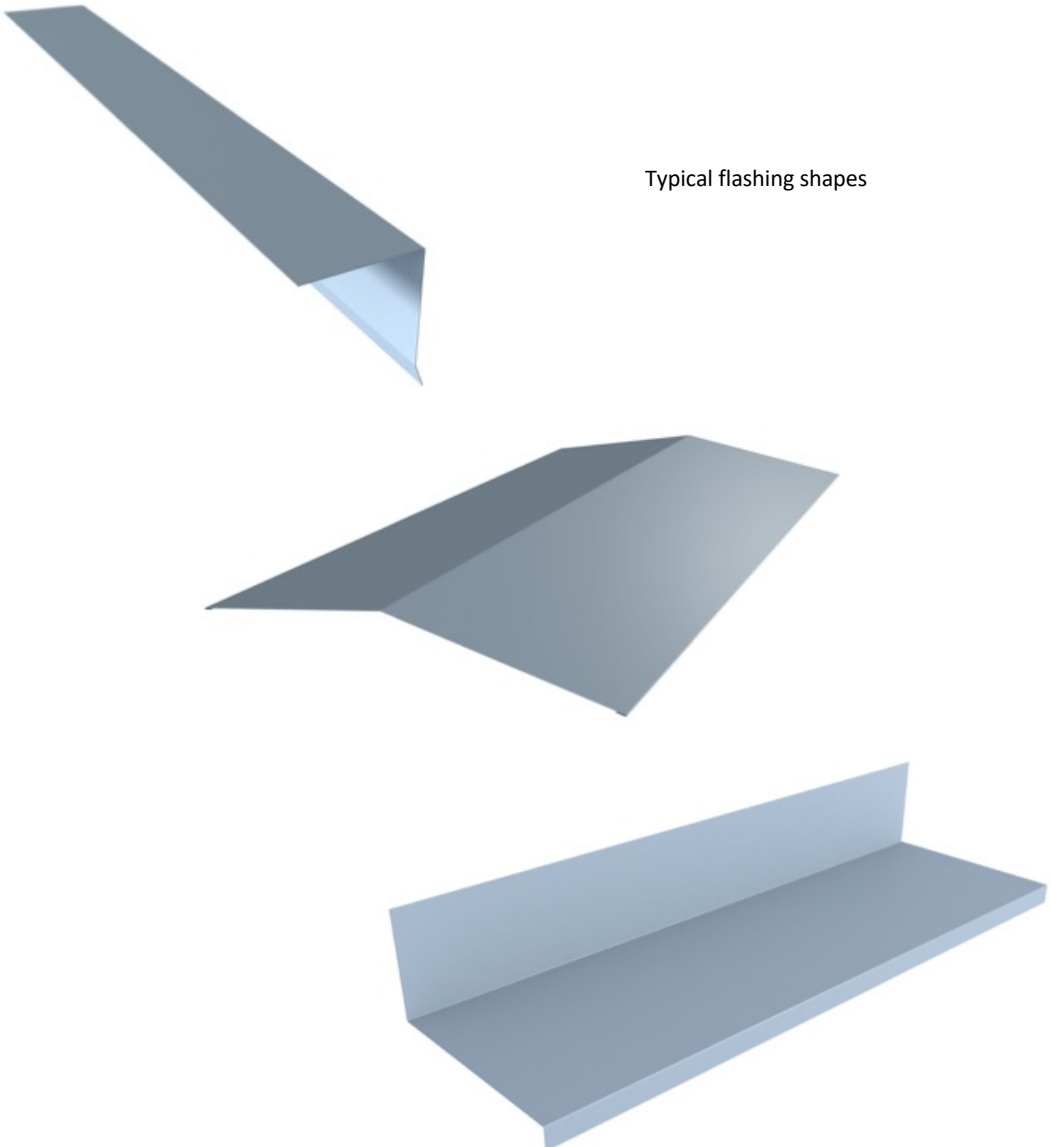

Trimform Flashings

Description	
<p>Application</p>	<p>Perimeter flashings are often the most prominent aspects of a roof or wall that are noticed by building users, the actual roof covering is often out of sight. The perimeter flashings and gutters need to be of high standard and to integrate together at corner junctions.</p> <p>Trimform Products specialises in the production of bespoke flashings to a customer’s design.</p> <p>Trimform holds a stock of the common metal roof and wall materials and colours to allow a quick turnaround for a customer’s order. Typical flashings are 0.7mm steel ridges, hips, eaves, verges and soakers in 200 micron PVC coated steel, Colorcoat® LG, Colorcoat® GP, Colorcoat HPS 200Ultra®, polyester or PVdF finishes. Flashings and secondary steel 1.5mm galv steel trimmers and zeds are made to order with standard 3m lengths or longer available with a girth up to 1500mm. Curved seam-lock formed sections and bonded stiffened flashings are made to order.</p> <p>The Trimform service includes the production of specialist flashings and fabrications using a customer’s free issue materials for those situations where the customer has to match a specific material, grade or finish. Trimform can use the customer’s materials for specialist fabrications.</p> <p>Whatever your requirement, speak to Trimform for guidance on the most cost effective design for production.</p> <div style="text-align: center;">  <p>Typical flashing shapes</p> </div>

Trimform Flashings

<p>Materials</p>	<p>Aluminium (1050 grade or to customer spec) Pre-coated aluminium (to suit fabrication) Galvanised (steel DX51) Pre-coated steel (S220GD+Z275, AZ150 or ZA255, BS EN 10346) Stainless steel (to customer spec) Customer free-issue specialist metals</p>
<p>Finishes</p>	<p>Post coated aluminium (PPC) to the specified RAL colour Pre-coated aluminium</p> <ul style="list-style-type: none"> • PUR-PA, 28µm • PVdF, 28µm • SP, 35µm <p>Pre-coated steel</p> <ul style="list-style-type: none"> • Generic Plastisol PVC(P), 200µm • Polyester SP, 25µm • High Build Polyester HBP, 50µm • Colorcoat HPS200 Ultra®, 200µm • Colorcoat® LG, Colorcoat® GP, 200µm
<p>Production methods</p>	<p>Folding Brake press Welding Punching CNC cutting TIG and MIG welding Curving</p>
<p>Delivery</p>	<p>Products are protected, banded, shrink wrapped. Delivery is by Trimform Products delivery fleet. Inspect packs and record any damage/shortages on delivery paperwork, backed by photos to be sent to Trimform with a report within 48 hours.</p>
<p>References</p>	
<p>Trimform Products</p>	<p>Trimform Products, Harding Way, Somersham Road, St. Ives, Huntingdon, Cambridgeshire, PE27 3WR T 01480 461103, F 01480 461102, E info@trimformfabs.co.uk Trimform Products (a division of Building Solutions (National) Limited). Registered in England and Wales No. 11912299. ©Building Solutions (National) Limited.</p> <p>Colorcoat HPS200 Ultra®, Colorcoat® LG, Colorcoat® GP and Confidex® are trademarks of Tata Steel UK Limited</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div data-bbox="416 1505 560 1615" style="text-align: center;">  <p>Assessed to ISO9001:2008 Cert No 1340-01</p> </div> <div data-bbox="580 1518 675 1610" style="font-size: 2em; font-weight: bold; letter-spacing: 0.5em;"> UK CA </div> <div data-bbox="1018 1518 1382 1585" style="text-align: center;">  </div> </div>