
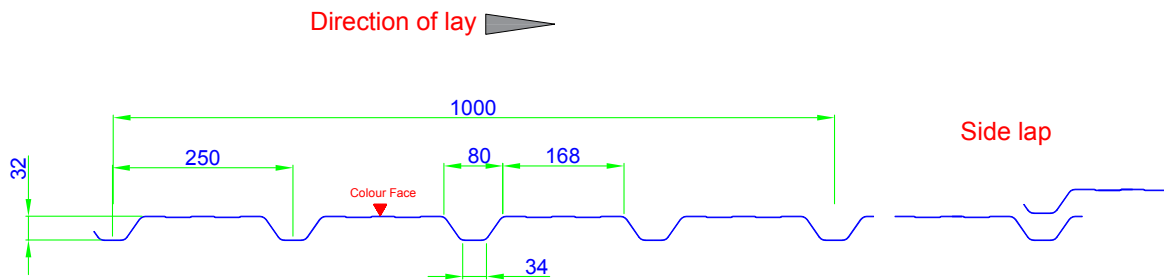


# TF324P-W

Description	
<b>Application</b>	Single skin or insulated twin skin walls, vertically or horizontally laid.
<b>Profile depth</b>	32mm
<b>Profile cover width</b>	1000mm
<b>Profile pitch</b>	250mm
<b>Nominal profile weight</b>	0.5mm = 4.8kg/m <sup>2</sup> 0.7mm = 6.7kg/m <sup>2</sup>
<b>Pack weight</b>	Max 2.0t
<b>Lengths</b>	Minimum length 1.00m Maximum length 10.00m
<b>Curve options</b>	N/A
<b>UKCA reference</b>	TF324P-W (Wall profile - Trapezoidal): BS EN 14782:2006

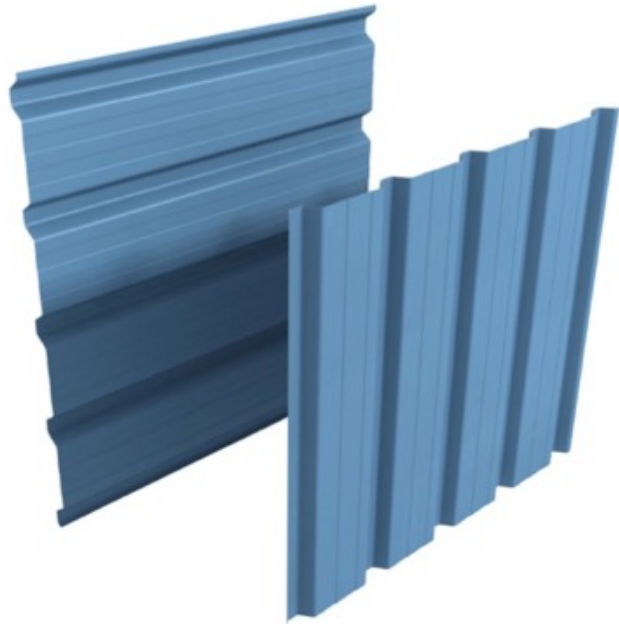

<b>Materials</b>	<p><b>Substrate:</b> 0.7mm steel, Class1, S220GD+Z275, AZ150 or ZA255 0.5mm steel, Class1, S220GD+Z275, AZ150 or ZA255</p> <p><b>Paint finish options:</b> To standard colour charts. Plastisol PVC(P), 200µm Polyester SP, 25µm High Build Polyester HBP, 50µm Colorcoat HPS200 Ultra®, 200µm Colorcoat® LG, 200µm Colorcoat® GP, 200µm</p> <p><b>Other:</b> Enquire with Trimform Products for the availability of aluminium and other paint finishes such as PVdF and Agri-Steel™</p>
------------------	--

# TF324P-W

## Installation

### TF324P-W: outer wall sheet: fixing guide


Standard fixing positions




End lap fixing positions




### End lap - Vertical wall sheet

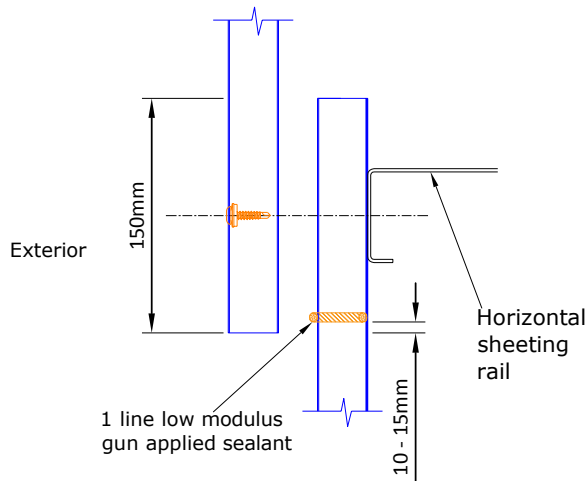


### End lap - Horizontal wall sheet

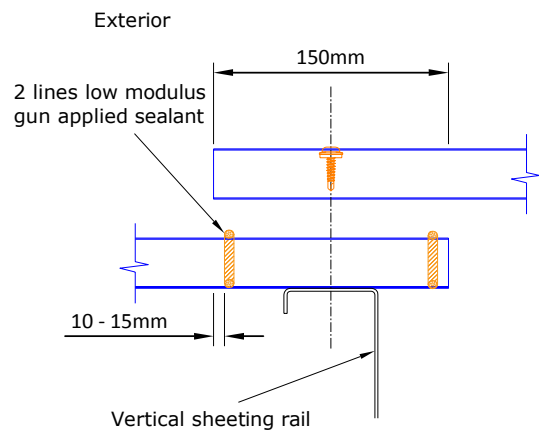

### Side lap - Vertical wall sheet

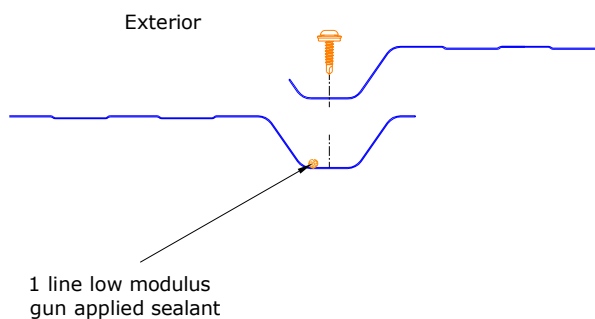

### Side lap - Horizontal wall sheet

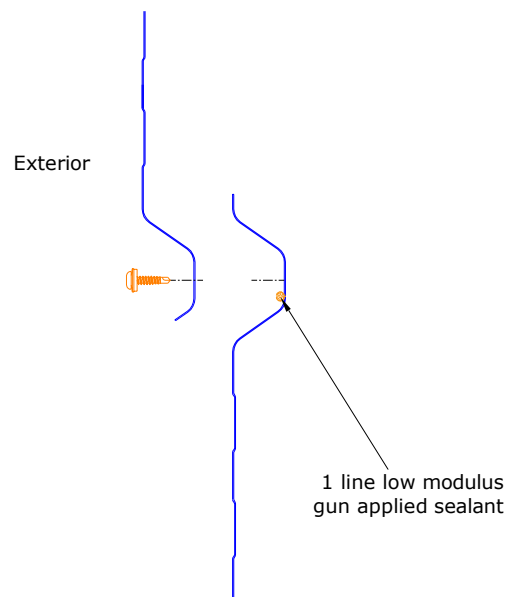

## TF324P-W

<p><b>Laps/Sealants</b></p>	<p><b>Wall – vertically laid:</b> End laps: 100mm, 1 line low modulus gun applied sealant. Side laps: one full rib overlap, 1 line low modulus gun applied sealant.</p> <p><b>Wall – horizontally laid:</b> End laps: 150mm, 2 lines low modulus gun applied sealant. Side laps: one full rib overlap, 1 line low modulus gun applied sealant. Sealant strips should be overlapped by 25mm, avoid stretch of sealant at profiles corners etc. Bed filler blocks in sealant to ensure best seal.</p>
<p><b>Fastener frequency</b></p>	<p><b>Wall – vertically laid:</b> End laps and perimeters (top/bottom of walls, penetrations): 4No/m (every trough) central to a 100mm end lap. Edge distance minimum 30mm. Intermediate supports: 4No/m (every trough). Side laps: Stitch at max 600mm centres.</p> <p><b>Wall – horizontally laid:</b> End laps and perimeters (top/bottom of walls, penetrations): 4No/m (every trough) central to a 100mm end lap. Edge distance minimum 30mm. Intermediate supports: 4No/m (every trough) or 3No/m, subject to wind load design. Side laps: stitch at max 600mm centres.</p>
<p><b>Fastener types</b></p>	<p>A2 stainless steel or carbon steel 5.5mm Ø, 16mm or 19mm Ø sealer washer, colour matched head Stitchers: A2 stainless steel or carbon steel 5.5mm or 6.3mm Ø, 16mm Ø sealer washer, colour matched head. Minimum embedment to timber 40mm. Note: A4 stainless fasteners required in coastal areas (within 2km of sea water)</p>
<p><b>Sealant types</b></p>	<p>Low modulus, non setting, neutral cure, gun applied</p>
<p><b>Delivery</b></p>	<p>Store at ground level in a protected area, on bearers (placed above each other), at a slope to drain, under tarpaulin if to be stored for longer than a week. Lift with care (do not drag sheets): &lt;6m- by site telehandler or forklift with tines set apart, 1 pack at a time, &gt;6m by crane using slings (not chains). Inspect packs and record any damage/shortages on delivery paperwork, backed by photos to be sent to Trimform with a report within 48 hours.</p>
<p><b>Site work</b></p>	<p>Side laps should face away from the prevailing wind Before installation check that the supporting structure is in a fit condition and to an acceptable installation tolerance to receive the wall construction. Do not over drive fasteners causing washer dishing Where profiles have to be cut on site:</p> <ul style="list-style-type: none"> <li>• Use a powered nibbler, reciprocating saw or circular saw. Do not use an abrasive wheel.</li> <li>• Support the profile along the line of the cut.</li> <li>• Protect the pre-coated finishes of the profile.</li> <li>• Clean any swarf or debris from the pre-coated finish of the profile immediately.</li> </ul> <p>Minor scuffing of the colour coating should not be treated. Deeper scratches which reach the substrate should be repaired with touch-up paint. The touch-up paint should only be applied to the original scratch using a fine paint brush. As touch-up paint will dry to a slightly different colour than the original coating the area which is touched up should be kept as small as possible. Protect from following trades.</p>

# TF324P-W

## Performance

### Structural

The loads shown are kN/m<sup>2</sup>, permissible for the profiles at the spans shown (ie load factors are within the tables, compare with unfactored loads).

- The designer must separately check fastener capacity under negative loads (wind uplift/suction).
- Minimum bearing width 40mm.
- “Single” = spanning over 2 purlins, “double” = 3 purlins, “multi” = 4 or more purlins.
- For spans exceeding 1.8m refer to Trimform.

BS 5427:16: Appendix C.5.6.4: Partial safety factors for limit state design. Load factors included within the load/span tables:

- Variable loads factor 1.5
- Permanent load factor 1.35
- Accidental load factor 1.05
- Serviceability load factor 1.0

Table 10: Deflection:

- Walls – wind L/90

### TF324P-W

Profile properties	$f_u = 220\text{N/mm}^2$		$E = 210\text{kN/mm}^2$		Broad flange in tension		Broad flange in compression	
	$t_N$ mm	Weight kg/m <sup>2</sup>	Web crushing $R_{w,Rd}$ kN/m		$M_{b,Rd}$ kNm/m	$I_{b,Rd}$ cm <sup>4</sup> /m	$M_{b,Rd}$ kNm/m	$I_{b,Rd}$ cm <sup>4</sup> /m
	0.7	6.49	8.79	0.979	9.810	0.925	10.326	
0.5	4.57	4.04	0.648	6.018	0.552	6.317		
	Span/m	1.2	1.3	1.4	1.5	1.6	1.7	1.8
0.7mm steel	Single	3.630	3.090	2.660	2.320	2.040	1.810	1.610
Wall application	Double	2.280	2.020	1.800	1.610	1.450	1.320	1.200
Positive/wind pressure	Multi	2.720	2.410	2.150	1.930	1.750	1.590	1.450
0.7mm steel	Single	3.430	2.920	2.520	2.190	1.930	1.710	1.520
Wall application	Double	2.350	2.080	1.850	1.660	1.500	1.360	1.240
Negative/wind suction	Multi	2.800	2.480	2.220	2.000	1.800	1.640	1.500
0.5mm steel	Single	2.400	2.040	1.760	1.540	1.350	1.200	1.070
Wall application	Double	1.190	1.060	0.950	0.860	0.780	0.710	0.650
Positive/wind pressure	Multi	1.420	1.260	1.130	1.020	0.930	0.840	0.770
0.5mm steel	Single	2.040	1.740	1.500	1.310	1.150	1.020	0.910
Wall application	Double	1.280	1.140	1.030	0.930	0.840	0.770	0.700
Negative/suction	Multi	1.520	1.350	1.220	1.100	1.000	0.920	0.840

# TF324P-W

<p><b>Non Fragility to ACR[M]001</b></p>	<p>N/A</p>
<p><b>Durability</b></p>	<p>Refer to Trimform for the durability performance of a particular material.</p> <p><b>In general:-</b>                  PVC plastisol finishes have a surface texture (leather grain or scintilla), polyester finishes are smooth. 200µm plastisol PVC paint finishes are most tolerant of foot traffic and installation and are particularly suited to roofing.                  Colorcoat HPS200 Ultra® has the longest manufacturer-to-building owner guarantee (Confidex®, up to 40 years). Colorcoat® LG and Colorcoat® GP have guarantees of up to 25 years, available via Trimform.                  Polyester coated materials are the most economic choice.                  High Build Polyester (HBP) has the best durability and tolerance of installation of the smooth finish polyester painted materials.                  Standing water must be avoided on pre-painted steel.                  Pre-painted finishes perform better if exposed to rainwash, this applies to roofs and walls.                  Roofs and walls should be inspected annually and any debris or items standing on the painted surface removed (build ups of moss/ leaves/ builders debris, dead birds etc).                  Damage to painted surfaces must be repaired.</p>
<p><b>Fire properties</b></p>	<p>Colorcoat HPS200 Ultra®, Colorcoat® LG and Colorcoat® GP:                  External fire performance: EN13501-5: Class B<sub>ROOF</sub> t(4).                  Reaction to fire: EN13501-1: CWFT C-s3,d0, Commission Decision 2010/737/EU table 2                  Generic Plastisol coated (PVC) steel:                  External fire performance: CWFT Commission Decision 2005/403/EC B<sub>ROOF</sub> t(1,2,3)                  Reaction to fire: EN13501-1: CWFT C-s3,d0 Commission Decision 2010/737/EU table 2                  Generic Polyester coated (PE) steel:                  External fire performance: CWFT Commission Decision 2000/553/EC                  Reaction to fire: Commission Decision 2010/737/EU table 1: A1</p>

<p><b>Safety data</b></p>	<p><b>COMPOSITION/INFORMATION ON INGREDIENTS</b></p> <p>Single skin coated steel profiled sheets products used for roof and wall cladding industrial and commercial buildings. Refer to Trimform and industry standard installation guidance for use. To be used in accordance with industry standard practices, Building Regulations and site RAMS. If any other use is to be considered, please contact Trimform.</p> <p><b>HAZARDS</b></p> <ol style="list-style-type: none"> <li>Under normal conditions of storage and when fixed, the products do not constitute a hazard.</li> <li>During the fixing operation or whilst handling, laceration of the skin is possible on the edges of the sections, and if oil is present on the material skin contamination may occur.</li> <li>When breaking open strapping which is used to secure bundles of sections, there is a risk of skin or eye injury.</li> <li>Some components are heavy and injury may result from incorrect lifting or handling.</li> <li>Cutting the product may cause flying swarf, which could injure skin, particularly eyes.</li> <li>When subjected to elevated temperatures, e.g. during welding or flame cutting, fumes containing oxides of iron and zinc may be produced, which can cause metal fume fever if inhaled. This is a short lasting condition with symptoms similar to influenza.</li> <li>If involved in a fire, any plastic components could degrade and generate smoke and fumes, which could be toxic if inhaled.</li> </ol> <p><b>FIRST AID MEASURES</b></p> <ul style="list-style-type: none"> <li>Inhalation: N/A</li> <li>Skin: Wash with soap and water</li> </ul>
---------------------------	---

# TF324P-W

- Eyes: If dust makes contact with eyes, rinse with clean water
- Ingestion: N/A
- Other: Seek medical attention if any symptoms persist

**FIRE-FIGHTING MEASURES**

Packaging, rubber elements and protective coatings may be combustible and emit hazardous fumes.

**ACCIDENTAL RELEASE MEASURES**

Product discarded in an unaltered form is classified as a non-hazardous waste.

**HANDLING/STORAGE**

1. Store in a location free from ignition hazard, such as open flames, cutting and welding torches, high surface temperatures, electric heaters and other forms of direct radiant heat.
2. Ensure stability of stack and provide adequate aisle space for access between stacks.
3. Store packs off the ground and on a slope so that should rain water penetrate the wrapping, water will drain away.
4. Support the packs evenly with bearers spaced at 2m. Bearers should always be placed one directly above another.
5. During the fixing operation or whilst handling, laceration of the skin is possible on the edge of the sheet.
6. Product is supplied in heavy bundles and injury may result from incorrect lifting or handling.
7. Cutting the product may cause flying swarf, which could injure skin, particularly eyes. Cutting can also produce dust, which can cause irritation if inhaled.

**EXPOSURE CONTROL/PERSONAL PROTECTION**

1. Protective clothing, particularly gloves, should be worn to avoid skin laceration.
2. Eye and ear protection should be used when cutting.
3. Do not use flame cutting equipment, blow lamps, or any high temperature equipment or process near the panels.
4. In a fire, breathing apparatus should be worn.

**PHYSICAL AND CHEMICAL PROPERTIES**

Coated steel sheets rolled to various profiles. Steel is hot-dip galvanised or Aluzinc coated.

**STABILITY AND REACTIVITY**

Stable and un-reactive under normal conditions.

**TOXICOLOGICAL INFORMATION**

N/A

**ECOLOGICAL INFORMATION**


No known adverse environmental effects.

**DISPOSAL INFORMATION**

Dispose at an authorised metal recycling facility in accordance with the Waste Management Licensing

# TF324P-W

	<p>Regulations. Observe usual safety precautions with polythene bags, wrapping and packaging. Waste product should be disposed of in accordance with local laws and regulations. Clean, undamaged product may be re-used.</p> <p><b>TRANSPORT INFORMATION</b></p> <p>Not classed as hazardous for transportation. Ensure security of load securing straps with edge protectors should be used. It is recommended that mechanical lifting equipment is used when moving bulk quantities</p> <p><b>REGULATORY INFORMATION</b></p> <p>N/A</p>
--	--

References			
<b>Reference Standards</b>	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%; vertical-align: top;">                     BS EN 508-1:2021                      BS EN 14782:2006                      BS EN 10346: 2015                      BS 5427:2016+A1:2017                      MCRMA GD 20 Guidance document on serviceability states and deflection criteria                 </td> <td style="width: 50%; vertical-align: top;">                     BS EN 1991-1-3:2003+A1:2015                      BS EN 13501-1:2018                      BSEN13501-5:2016                      ACR[M]001-2019 [Sixth edition]                      MCRMA Guidance Documents and Design Guides  <a href="http://www.mcrma.co.uk">www.mcrma.co.uk</a> </td> </tr> </table>	BS EN 508-1:2021 BS EN 14782:2006 BS EN 10346: 2015 BS 5427:2016+A1:2017 MCRMA GD 20 Guidance document on serviceability states and deflection criteria	BS EN 1991-1-3:2003+A1:2015 BS EN 13501-1:2018 BSEN13501-5:2016 ACR[M]001-2019 [Sixth edition] MCRMA Guidance Documents and Design Guides <a href="http://www.mcrma.co.uk">www.mcrma.co.uk</a>
BS EN 508-1:2021 BS EN 14782:2006 BS EN 10346: 2015 BS 5427:2016+A1:2017 MCRMA GD 20 Guidance document on serviceability states and deflection criteria	BS EN 1991-1-3:2003+A1:2015 BS EN 13501-1:2018 BSEN13501-5:2016 ACR[M]001-2019 [Sixth edition] MCRMA Guidance Documents and Design Guides <a href="http://www.mcrma.co.uk">www.mcrma.co.uk</a>		
<b>Trimform Products</b>	<p>Trimform Products, Harding Way, Somersham Road, St. Ives, Huntingdon, Cambridgeshire, PE27 3WR                      T 01480 461103, F 01480 461102, E <a href="mailto:info@trimformfabs.co.uk">info@trimformfabs.co.uk</a>                      Trimform Products (a division of Building Solutions (National) Limited). Registered in England and Wales No. 11912299.                      ©Building Solutions (National) Limited.</p> <p>Colorcoat HPS200 Ultra®, Colorcoat® LG, Colorcoat® GP and Confidex® are trademarks of Tata Steel UK Limited</p> <div style="text-align: center;">  <p>Assessed to BS EN ISO 9001:15                      Cert No 635-1:iss03</p> </div>		